



# C&D TRUE FRONT ACCESS®

## TEL Series Float Service



TEL12-210Fa



Typical Wireline Application



Typical Wireless Application

### **BENEFITS:**

- Long Life Float Service Design
  - Confirmed via 3rd party Certification
  - Premium alloy and material components
- True Front Access Design
  - True direct connect terminal for reliability
  - C&D Ohmic Ring® for accurate testing
  - Connection versatility
- Maximum Performance
  - Superior output due to direct terminal connection
  - Low internal resistance
- Compliant to major global specifications
  - British Standard BS 6290: Part 4: 1997
  - IEC 60896-21/22
  - Telcordia SR-4228
  - Eurobat Guide Classification: Long Life
  - Bellcore GR-63-CORE & GR-1089-CORE
  - UL94 V-0FR
  - Non-Hazardous, not restricted for any transportation mode (air, water or land)

### **SPECIFICATIONS**

Battery	Voltage Per Unit	Ampere Hour Capacity 8 Hour Rate @ 77°F (25°C) to 1.75 v/c	Ampere Hour Capacity 10 Hour Rate @ 68°F (20°C) to 1.80 v/c	Maximum Discharge Current	Short Circuit Current	Ohms Impedance 60 Hz (Ω)	Battery Weight
TEL12-210Fa	12 V	202 Ah	199 Ah	800 Amperes	4500 Amperes	0.0040 Ohms	140 lbs/64 kg

## SPECIFICATIONS


Ampere Hour Capacity to 1.75 Volts per Cell @77°F (25°C)  
Discharge in Hours

Model	1	2	3	4	5	6	7	8	9	10
TEL12-210Fa	138	165	170	176	190	194	199	202	206	209

Ampere Hour Capacity to 1.80 Volts per Cell @68°F (20°C)  
Discharge in Hours

Model	1	2	3	4	5	6	7	8	9	10
TEL12-210Fa	126	153	153	158	175	179	183	186	190	192

## DIMENSIONS

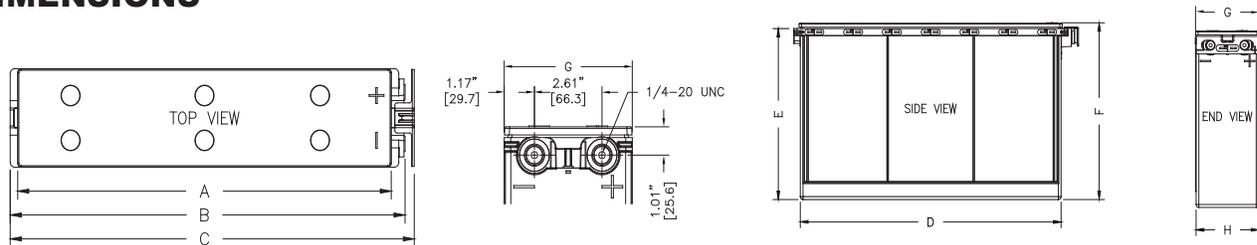

MODEL	A		B		C		D		E		F		G		H	
	in	mm	in	mm	in	mm										
TEL12-210Fa	20.3	516	21.5	546	22.0	559	20.1	512	12.2	310	12.6	320	4.9	126	4.8	123

\* All dimensions in inches and (millimeters). All dimensions are for reference only. Contact a C&D Representative for complete dimensional information.

<b>Operating Temperature Range with temperature compensation</b>	Discharge: -40°F (-40°C) to 160°F (71°C) Charge: -10°F (-23°C) to 140°F (60°C)		
<b>Nominal Operating Temperature Range</b>	+68°F (20°C) to +80°F (27°C)		
<b>Recommended Maximum Charging Current Limit</b>	C <sub>20</sub> /5 Amperes (46 A)		
<b>Float Charging Voltage</b>	13.5 to 13.8 VDC average per 12V unit		
<b>Maximum AC Ripple (Charger)</b>	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Max AC ripple voltage allowed = 1.4% RMS (4% P-P) Max AC ripple current allowed = 11.5 amperes RMS (C <sub>20</sub> /20)		
<b>Self Discharge</b>	Battery can be stored up to 6 months at 77°F (25°C) before a freshening charge is required. Batteries stored at temperatures greater than 77°F (25°C) will require recharge sooner than batteries stored at lower temperatures. See C&D bulletin 41-7272, Self-Discharge and Inventory Control for details.		
<b>Equalize charge and cycle service voltage</b>	14.40 to 14.80 VDC average per 12V unit @ 77°F (25°C)		
<b>Terminal: Inserted - Inter-unit connector and hardware provided</b>	Threaded copper alloy insert terminal to accept 1/4-20 bolt		
<b>Terminal Hardware Torque:</b>	110 in.-lbs. (12.4 N-m)		
<b>Telcordia Part Numbers</b>	<b>Battery Part Number</b> TEL12-210Fa	<b>CLEI Code</b> Pending	<b>CPR</b> Pending

## C&D TECHNOLOGIES, INC.

1400 Union Meeting Road  
P.O. Box 3053 • Blue Bell, PA19422-0858  
(215) 619-2700 • Fax (215) 619-7899 • (800) 543-8630  
customersvc@cdtechno.com  
www.cdtechno.com

Any data, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application.

Copyright 2013 C&D TECHNOLOGIES, INC. Printed in U.S.A. 12-1109 0213/CD