


# 8G22NF-DEKA

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	58Ah
Capacity at C/20	51Ah
Weight	37 lbs. (16.8 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 68°F (20°C)	
Cycle	2.30 - 2.35VPC
Float	2.25 - 2.30VPC
Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	G (T881)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:


Valve-Regulated, Gelled-Electrolyte Battery



## DIMENSIONS

Length (mm)	8.99 (228 mm)
Width (mm)	5.47 (139 mm)
Height (mm)	9.24 (235 mm)

Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity

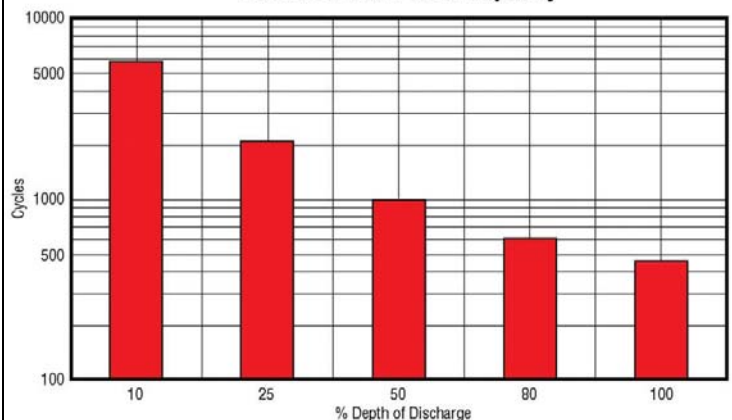

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: [sales@mkbattery.com](mailto:sales@mkbattery.com)

