



SPECIFICATIONS

General Purpose Flooded Batteries

MCX — LEAD CALCIUM

NCX — LEAD CALCIUM

GENERAL PURPOSE TYPE MCX - LEAD CALCIUM

**CAPACITIES — 175 A.H. TO 605 A.H.
8 HOUR RATE TO 1.75 V.P.C. @ 77°F (25°C)**

20 YEAR LIFE EXPECTANCY

SPECIFICATIONS

Jar — Styrene-Acrylonitrile (SAN) Plastic

Cover — Acrylonitrile Butadiene Styrene (ABS) Plastic

Separators — Microporous Material

Retainers — Fiberglass Mat

Posts — Two (per cell) 1.00" (25.4mm) Square

Post Seals — Floating "O" Ring - Seal Nut

Vents — Exide "Pre-Vent" Flame Arrester

Level Lines — High and Low - All Jar Faces

Electrolyte — Height above plates - 2.50" (63.5 mm)

Electrolyte Withdrawal Tubes — 2 Per Cell

Sediment Space — .95" (24.1 mm)

Specific Gravity — 1.215 @ 77°F (25°C)

Inter-Cell Connectors — Lead Plated Copper

Hardware — Type 316 Stainless Steel



Plate Dimensions	Height	Width	Thickness
Positive Plate	11.56 in 293.6 mm	9.19 in 233.4 mm	.325 in 8.26 mm
Negative Plate	11.56 in 293.6 mm	9.19 in 233.4 mm	.220 in 5.59 mm

Cell Type	Amp-Hour Capacity ¹	Overall Dimensions			Approximate Weight		Electrolyte Per Cell
		Length	Width	Height	Net	Packed	
2-MCX-5*	176	6.25 in 159 mm	11.13 in 283 mm	18.25 in 464 mm	105 lbs 48 kg	111 lbs 50 kg	1.3 gal 4.9 liter
2-MCX-7*	256	6.25 in 159 mm			125 lbs 57 kg	131 lbs 59 kg	1.2 gal 4.5 liter
MCX-9	344	4.13 in 105 mm			80 lbs 36 kg	84 lbs 38 kg	1.6 gal 6.0 liter
MCX-11	432	5.13 in 130 mm			97 lbs 44 kg	102 lbs 46 kg	1.9 gal 7.2 liter
MCX-13	520	6.50 in 165 mm			118 lbs 54 kg	124 lbs 56 kg	3.0 gal 11.4 liter
MCX-15	608	6.50 in 165 mm			129 lbs 59 kg	135 lbs 61 kg	2.7 gal 10.2 liter

*2 Cells per unit

¹8 hour rate to 1.75 VPC @ 77°F (25°C)

AMP DATA @ 77°F (25°C) **MCX CELLS**

CELL TYPE	HOURS							MINUTES		
	8	5	4	3	2	1.5	1	30	15	1
End Voltage — 1.75										
2-MCX-5	22	30	36	44	57	68	85	117	157	234
2-MCX-7	32	46	54	66	86	102	128	176	231	339
MCX-9	43	61	72	88	114	136	170	234	304	448
MCX-11	54	76	90	110	143	170	213	293	380	550
MCX-13	65	91	108	132	171	204	255	351	457	654
MCX-15	76	106	126	154	200	238	298	410	535	756
End Voltage — 1.78										
2-MCX-5	21	29	35	42	54	65	80	109	148	204
2-MCX-7	32	45	52	63	81	98	120	164	217	295
MCX-9	42	60	70	84	108	130	160	218	287	389
MCX-11	53	75	87	105	135	163	200	273	355	479
MCX-13	63	90	104	126	162	196	240	327	425	569
MCX-15	74	105	122	147	189	228	280	382	494	657
End Voltage — 1.81										
2-MCX-5	20	28	34	41	53	62	76	102	140	173
2-MCX-7	30	43	50	62	79	94	114	153	203	250
MCX-9	40	57	67	82	105	125	152	204	269	331
MCX-11	51	71	84	103	132	156	191	255	330	407
MCX-13	61	85	101	123	158	187	229	306	392	483
MCX-15	71	99	118	144	184	218	267	357	453	559

AMP DATA @ 77°F (25°C) MCX CELLS

CELL TYPE	HOURS							
	8	5	4	3	2	1.5	1	0.5
End Voltage — 1.84								
2-MCX-5	19	28	32	39	49	58	71	92
2-MCX-7	29	41	48	58	74	87	107	138
MCX-9	38	55	64	77	98	116	142	184
MCX-11	48	69	80	97	123	145	178	230
MCX-13	57	83	96	116	147	174	213	276
MCX-15	67	97	112	135	172	203	249	322
End Voltage — 1.88								
2-MCX-5	18	25	29	35	44	51	61	76
2-MCX-7	27	38	44	53	66	77	92	114
MCX-9	36	50	58	70	88	103	122	152
MCX-11	45	63	73	88	110	129	153	190
MCX-13	54	75	87	105	132	154	183	228
MCX-15	63	88	102	123	154	180	214	266
End Voltage — 1.90								
2-MCX-5	17	24	27	32	40	46	54	66
2-MCX-7	26	35	41	48	60	69	81	99
MCX-9	34	47	54	64	80	92	108	132
MCX-11	43	59	68	80	100	115	135	165
MCX-13	51	71	81	96	120	138	162	198
MCX-15	60	83	95	112	140	161	189	231
End Voltage — 1.92								
2-MCX-5	16	22	24	28	36	41	48	58
2-MCX-7	24	32	37	43	54	62	72	86
MCX-9	32	43	49	57	72	82	96	115
MCX-11	40	54	61	71	90	103	120	144
MCX-13	48	65	73	85	108	123	144	173
MCX-15	56	76	85	99	126	144	168	202

**GENERAL PURPOSE
TYPE NCX — LEAD CALCIUM
CAPACITIES — 550 A.H. to 2550 A.H.
8 HOUR RATE TO 1.75 V.P.C. @ 77°F (25°C)
20 YEAR LIFE EXPECTANCY**

SPECIFICATIONS

- ***Jar** — Styrene-Acrylonitrile (SAN) Plastic
- ***Cover** — Acrylonitrile Butadiene Styrene (ABS) Plastic
- Separators** — Microporous Material
- Retainers** — Fiberglass Mats
- Posts** — NCX 7-17 two-1.5" (38.1 mm) square
NCX 19-27 four-1.0" (25.4 mm) square
NCX 29-35 four-1.5" (38.1 mm) square
- Post Seals** — Floating "O" Ring - Seal Nut
- Vents** — Exide "Pre-Vent" Flame Arrester
- Level Lines** — High and Low - All Jar Faces
- Electrolyte** — Height above plates - 2.75" (69.9 mm)
- Electrolyte Withdrawal Tubes** — 2 per cell
- Sediment Space** — 1.06" (26.9 mm)
- Specific Gravity** — 1.215 @ 77°F (25°C)
- Inter-Cell Connectors** — Lead Plated Copper
- ***Optional** — PVC Jar and Cover
 - UL 94 — V-O / 32% L.O.I. Rated
 - NCX 23 to 27 Sizes Only

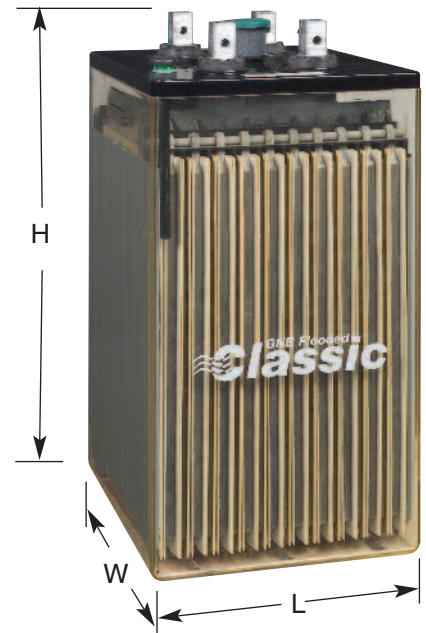


Plate Dimensions	Height	Width	Thickness
Positive Plate	15.0 in 381.0 mm	12.5 in 317.5 mm	.325 in 8.26 mm
Negative Plate	15.0 in 381.0 mm	12.5 in 317.5 mm	.220 in 5.59 mm

Cell Type	Amp-Hour Capacity ¹	Overall Dimensions			Approximate Weight		Electrolyte
		Length	Width	Height	Net	Packed	Per Cell
NCX-7	552	7.38 in 187 mm	14.5 in 368 mm	22.13 in 562 mm	160 lbs 72 kg	168 lbs 76 kg	6.4 gal 24.2 liter
NCX-9	688				177 lbs 80 kg	189 lbs 86 kg	6.0 gal 22.7 liter
NCX-11	824				195 lbs 89 kg	207 lbs 94 kg	5.6 gal 21.2 liter
NCX-13	952				213 lbs 97 kg	225 lbs 102 kg	5.1 gal 19.3 liter
NCX-15	1072				231 lbs 105 kg	243 lbs 110 kg	5.0 gal 18.9 liter
NCX-17	1200				249 lbs 112 kg	261 lbs 117 kg	4.9 gal 18.5 liter
NCX-19	1368	9.25 in 235 mm		22.5 in 572 mm	282 lbs 128 kg	294 lbs 134 kg	6.3 gal 23.8 liter
NCX-21	1496				301 lbs 137 kg	313 lbs 142 kg	6.0 gal 22.7 liter
NCX-23*	1680	11.38 in 289 mm			348 lbs 158 kg	366 lbs 166 kg	8.0 gal 30.3 liter
NCX-25*	1808				364 lbs 165 kg	382 lbs 174 kg	7.6 gal 28.8 liter
NCX-27*	1944				380 lbs 173 kg	398 lbs 181 kg	7.3 gal 27.6 liter
NCX-29	2152	14.56 in 370 mm			446 lbs 203 kg	464 lbs 211 kg	11.5 gal 43.5 liter
NCX-31	2280				462 lbs 210 kg	480 lbs 218 kg	10.9 gal 41.3 liter
NCX-33	2416				479 lbs 218 kg	497 lbs 226 kg	10.3 gal 39.0 liter
NCX-35	2552				496 lbs 225 kg	514 lbs 234 kg	9.7 gal 36.7 liter

¹8 hour rate to 1.75 VPC @ 77°F (25°C)

AMP DATA @ 77°F (25°C) NCX CELLS

CELL TYPE	HOURS							MINUTES		
	8	5	4	3	2	1.5	1	30	15	1
End Voltage — 1.75										
NCX-7	69	96	112	134	170	207	245	300	340	436
NCX-9	86	124	138	165	204	240	300	454	515	712
NCX-11	103	149	167	200	252	300	375	561	686	880
NCX-13	119	171	198	238	292	345	450	666	814	1044
NCX-15	134	194	227	277	350	412	525	768	939	1204
NCX-17	150	216	254	312	405	465	600	867	1060	1306
NCX-19	171	246	290	357	460	535	675	953	1165	1494
NCX-21	187	270	317	390	515	590	750	1033	1263	1620
NCX-23	210	301	354	436	560	660	825	1136	1389	1782
NCX-25	226	326	384	472	615	725	900	1232	1506	1932
NCX-27	243	351	412	507	670	785	975	1327	1622	2080
NCX-29	269	389	455	555	715	857	1050	1429	1747	2240
NCX-31	285	411	483	595	770	925	1125	1531	1872	2400
NCX-33	302	435	512	629	820	995	1200	1633	1966	2560
NCX-35	319	459	539	663	868	1053	1275	1735	2121	2720
End Voltage — 1.78										
NCX-7	67	93	108	129	165	197	228	282	324	416
NCX-9	83	120	132	156	196	228	279	376	432	555
NCX-11	100	144	162	193	242	285	349	470	540	686
NCX-13	115	166	190	228	280	328	419	564	648	814
NCX-15	130	187	220	261	336	391	488	658	756	939
NCX-17	146	209	244	293	389	442	558	752	864	1061
NCX-19	165	239	279	333	442	508	628	846	972	1165
NCX-21	182	262	305	366	494	561	698	940	1080	1264
NCX-23	202	292	341	407	538	627	767	1034	1188	1390
NCX-25	219	316	369	440	590	689	837	1128	1296	1507
NCX-27	237	340	396	476	643	746	907	1222	1404	1622
NCX-29	260	375	441	522	694	814	977	1316	1512	1747
NCX-31	275	399	465	555	747	879	1046	1410	1620	1872
NCX-33	292	422	492	586	795	945	1116	1504	1728	1997
NCX-35	310	445	518	623	842	1000	1186	1598	1836	2122
End Voltage — 1.81										
NCX-7	65	90	104	124	153	182	208	255	285	348
NCX-9	81	117	127	152	184	211	255	340	380	440
NCX-11	97	140	156	185	227	264	319	425	475	550
NCX-13	112	162	183	218	263	304	383	510	570	660
NCX-15	127	182	211	252	315	363	446	595	665	770
NCX-17	141	203	236	285	365	409	510	680	760	880
NCX-19	161	232	267	324	414	471	574	765	855	966
NCX-21	176	254	295	357	464	519	638	850	950	1071
NCX-23	197	284	327	396	505	581	701	935	1045	1176
NCX-25	213	307	357	428	554	638	765	1020	1140	1285
NCX-27	229	330	383	464	603	691	829	1105	1235	1394
NCX-29	254	364	423	509	643	754	893	1190	1330	1700
NCX-31	268	387	446	540	693	814	956	1275	1425	1810
NCX-33	284	410	476	571	738	875	1020	1360	1520	1930
NCX-35	300	432	505	606	781	926	1084	1445	1615	2050

AMP DATA @ 77°F (25°C) NCX CELLS

CELL TYPE	HOURS						
	8	5	4	3	2	1.5	1
End Voltage — 1.84							
NCX-7	62	87	98	118	139	163	183
NCX-9	78	110	124	144	167	190	225
NCX-11	94	132	150	176	207	237	281
NCX-13	108	152	177	210	239	273	338
NCX-15	123	172	201	240	287	325	394
NCX-17	137	192	224	269	332	367	450
NCX-19	156	219	254	306	377	423	506
NCX-21	171	240	280	336	422	466	563
NCX-23	191	268	310	374	459	521	619
NCX-25	207	290	339	404	504	573	675
NCX-27	222	312	364	437	549	620	731
NCX-29	246	344	402	480	586	677	787
NCX-31	260	366	423	510	631	730	843
NCX-33	276	387	452	538	672	786	900
NCX-35	291	408	476	572	711	832	956
End Voltage — 1.86							
NCX-7	60	83	94	112	129	151	169
NCX-9	74	104	115	137	155	175	207
NCX-11	89	124	140	168	192	219	259
NCX-13	103	144	165	198	222	252	311
NCX-15	116	162	189	226	266	301	362
NCX-17	130	180	210	253	308	339	414
NCX-19	148	205	238	288	350	391	466
NCX-21	162	226	262	316	391	431	518
NCX-23	181	250	291	352	426	482	569
NCX-25	196	273	318	380	467	529	621
NCX-27	211	293	341	411	509	573	673
NCX-29	232	324	378	452	543	625	724
NCX-31	247	342	397	480	585	675	776
NCX-33	262	364	424	506	623	726	828
NCX-35	276	384	446	538	659	768	879
End Voltage — 1.88							
NCX-7	57	78	90	105	119	138	152
NCX-9	70	96	108	130	143	161	186
NCX-11	84	116	132	160	176	201	233
NCX-13	97	134	154	188	204	231	279
NCX-15	110	152	176	214	245	276	326
NCX-17	123	169	196	240	284	312	372
NCX-19	140	192	222	273	322	355	419
NCX-21	153	212	245	300	361	395	465
NCX-23	171	235	272	333	392	442	512
NCX-25	186	256	297	364	431	486	558
NCX-27	199	275	318	390	469	526	605
NCX-29	220	305	353	429	500	574	651
NCX-31	234	321	371	455	539	619	697
NCX-33	248	342	396	485	574	666	744
NCX-35	261	360	416	510	607	705	790
End Voltage — 1.92							
NCX-7	48	65	73	85	93	105	115
NCX-9	60	82	89	108	112	122	141
NCX-11	72	99	108	131	139	153	176
NCX-13	84	114	129	156	161	176	212
NCX-15	95	128	147	179	193	210	247
NCX-17	106	144	164	200	223	237	282
NCX-19	120	163	186	228	253	273	317
NCX-21	132	180	205	250	283	301	353
NCX-23	147	200	228	278	308	337	388
NCX-25	160	218	246	304	338	370	423
NCX-27	172	234	266	325	369	400	458
NCX-29	190	257	294	359	393	437	493
NCX-31	200	273	311	380	423	471	528
NCX-33	214	291	328	405	451	507	564
NCX-35	225	306	348	425	477	537	599

Exide Technologies – The Industry Leader.



Exide Technologies Industrial Energy is a global leader in motive power battery and charger systems for electric lift trucks and other material handling equipment. Network power applications include communication/data networks, UPS systems for computers and control systems, electrical power generation and distribution systems, as well as a wide range of other industrial standby power applications. With a strong manufacturing base in both North America and Europe and a truly global reach (operations in more than 80 countries) in sales and service, Exide Technologies Industrial Energy is best positioned to satisfy your back up power needs locally as well as all over the world.

Based on over 100 years of technological innovation the Network Power Division leads the industry with the most recognized global brands such as ABSOLYTE®, GNB FLOODED CLASSIC®, MARATHON®, ONYX™, RELAY GEL®, SONNENSCHN® and SPRINTER®. They have come to symbolize quality, reliability, performance and excellence in all the markets served.

Exide Technologies takes pride in its commitment to a better environment. Its Total Battery Management program, an integrated approach to manufacturing, distributing and recycling of lead acid batteries, has been developed to ensure a safe and responsible life cycle for all of its products.

Exide Technologies Industrial Energy

USA - Tel: 888.898.4462

Canada - Tel: 800.268.2698

www.exide.com



This document is printed on paper containing
10% post consumer recycled paper