


Precision Cooling
For *Business-Critical Continuity™*

Liebert® DataMate™

Economical, Space-Saving Cooling Systems For Sensitive Electronics



Precision Cooling Designed To Fit The Smallest Spaces

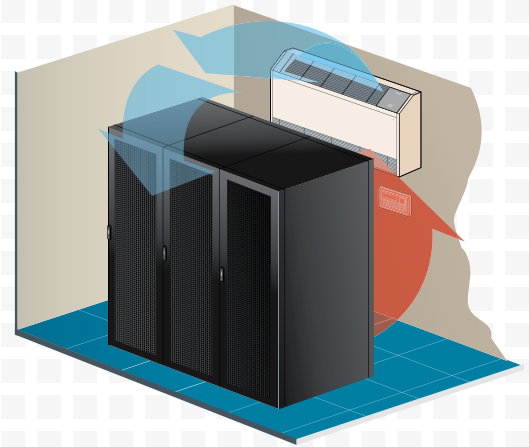

Liebert DataMate precision environmental systems are the perfect solution for cramped quarters requiring temperature and humidity control for sensitive electronics. And while the systems are matched to meet the needs of computers, they are also designed to be convenient for the people sharing space with the protected equipment.

Space-saving. The slim, compact Liebert DataMate may be wall- or floor-mounted, and requires minimal service access, limiting floor space requirements.

High sensible cooling capacity. Unlike “comfort” air conditioners, Liebert precision cooling systems are designed for the cooling requirements of electronic equipment—80% of the capacity dedicated to the removal of dry “sensible” heat, and 20% for control of humidity.

Reliable. The Liebert DataMate installed-base is a testimonial to system reliability. Components include a compressor; a high efficiency copper-tube, aluminum-fin evaporator coil; and a double inlet, direct drive fan.

Quiet. The units are designed to operate quietly with the compressor vibration-isolated from the chassis. The cabinet is also insulated to further ensure quiet operation. On many models, the compressor-containing condensing unit can be remotely located to further reduce noise levels in the controlled space. Quiet-Line outdoor condensing units are available for 6-8 dba sound level reduction over the standard models.


Flexibility options. Liebert DataMate systems are available in capacities of 1.5, 2 and 3 tons in air, water, glycol, and a self-contained 3 ton chilled water model. Systems may be configured as self-contained or separated from the condensing unit, depending on the model.

Easy installation. All Liebert DataMate components are precharged, and require no field brazing, evacuation or charging. Precharged refrigerant lines are available to connect evaporator and remote condensing unit modules when required.


Two-speed fan operation. High speed provides quiet operation and maximum cooling. Low speed provides maximum dehumidification and lowest sound level. The speed can be automatically or manually selected.

Corrosion-Resistant Cabinet.


Durability is ensured with Powder Coated Paint panels.




Outdoor Air Cooled. Suitable for roof or ground level site. The condensing unit is designed for operation as low as -30° F.




Indoor Air Cooled. For high-rise and other applications where roof or ground level locations are impractical. May be located above the dropped ceiling and ducted to the outside. Designed for operation down to -20° F ambient.




The compact Liebert DataMate system requires minimal floorspace; when wall-mounted, no floorspace is required.



Water/Glycol Cooled Remote. Utilizes an existing water or glycol loop. Condensing unit is located under the raised floor or above the dropped ceiling.



Water/Glycol Cooled Integral. Totally packaged. A single power and water supply connection puts the unit in operation.



Chilled Water. This unit simply connects to a chilled water loop, for quick and easy installation.

Indoor and outdoor condensing unit options maximize DataMate installation options for better system flexibility. Outdoor models are available in Quiet-Line and High Ambient versions.



Specifications

		60Hz					50 Hz				
		Air-Cooled System									
		with Outdoor Condensing Unit Split System			with Indoor Condensing Unit Split System		with Outdoor Condensing Unit Split System			with Indoor Condensing Unit Split System	
Evaporator	DME020E	DME027E	DME037E	DME027E	DME037E	DME020E	DME027E	DME037E	DME027E	DME037E	
Condensing Unit	PFH020A	PFH027A	PFH037A	MCD24A	MCD36A	PFH019A	PFH026A	PFH036A	MCD23A	MCD35A	

Net Capacity Data* - kW (Btuh) - High Fan Speed

80°F DB (26.7°C) 38 %RH	Total	5.40 (18,500)	7.10 (24,200)	10.1 (34,600)	6.85 (23,300)	9.60 (32,700)	5.15 (17,500)	6.50 (22,200)	9.90 (33,800)	6.40 (21,800)	9.45 (32,300)
	Sensible	5.40 (18,500)	7.10 (24,200)	9.70 (33,100)	6.85 (23,300)	9.40 (32,000)	5.05 (17,200)	6.50 (22,200)	8.85 (30,200)	6.40 (21,800)	8.65 (29,500)
75°F DB (23.9°C) 45 %RH	Total	5.05 (17,200)	6.60 (22,500)	9.75 (33,200)	6.35 (21,700)	9.15 (31,300)	4.80 (16,400)	6.15 (20,900)	9.55 (32,500)	6.00 (20,500)	9.10 (31,100)
	Sensible	4.90 (16,700)	6.50 (22,200)	8.60 (29,400)	6.35 (21,600)	8.35 (28,500)	4.50 (15,300)	5.90 (20,100)	7.90 (26,900)	5.80 (19,800)	7.70 (26,300)
72°F DB (22.2°C) 50 %RH	Total	4.85 (16,500)	6.35 (21,700)	9.50 (32,400)	6.10 (20,800)	8.95 (30,600)	4.65 (15,900)	5.95 (20,300)	9.30 (31,800)	5.80 (19,800)	8.90 (30,400)
	Sensible	4.50 (15,400)	6.05 (20,600)	7.95 (27,100)	5.90 (20,100)	7.70 (26,200)	4.10 (14,000)	5.40 (18,500)	7.30 (24,900)	5.35 (18,300)	7.10 (24,300)

Evaporator Condensing Unit	60 Hz						50 Hz			
	WATER COOLED			GLYCOL COOLED			WATER COOLED		GLYCOL COOLED	
	DME020E DMC022WG	DME027E "DMC029WG/ MCD26W"	DME037E "DMC040WG/ MCD38W"	DME020E DMC022WG	DME027E "DMC029WG/ MCD26W"	DME037E "DMC040WG/ MCD38W"	DME027E MCD25W	DME037E MCD37W	DME027E MCD25W	DME037E MCD37W

Net Capacity Data* - kW (Btuh) - High Fan Speed

80°F DB (26.7°C) 38 %RH	Total	5.90 (20,100)	7.95 (27,200)	11.4 (38,900)	5.15 (17,600)	6.75 (23,000)	9.65 (32,900)	7.55 (25,700)	11.3 (38,700)	6.15 (21,000)	9.30 (31,800)
	Sensible	5.80 (19,800)	7.90 (27,000)	10.3 (35,300)	5.15 (17,600)	6.75 (23,000)	9.40 (32,100)	7.20 (24,600)	9.55 (32,600)	6.15 (21,000)	8.60 (29,300)
75°F DB (23.9°C) 45 %RH	Total	5.50 (18,800)	7.55 (25,800)	11.0 (37,400)	4.80 (16,300)	6.25 (21,300)	9.20 (31,400)	7.20 (24,500)	11.0 (37,400)	5.75 (19,600)	8.95 (30,500)
	Sensible	5.15 (17,600)	7.10 (24,200)	9.20 (31,400)	4.75 (16,200)	6.25 (21,300)	8.35 (28,500)	6.45 (22,000)	8.55 (29,200)	5.65 (19,300)	7.60 (26,000)
72°F DB (22.2°C) 50 %RH	Total	5.35 (18,100)	7.35 (25,000)	10.7 (36,600)	4.60 (15,700)	6.00 (20,500)	8.95 (30,600)	7.00 (23,900)	10.7 (36,600)	5.55 (19,000)	8.75 (29,900)
	Sensible	4.75 (16,200)	6.55 (22,300)	8.55 (29,100)	4.35 (14,900)	5.85 (19,900)	7.70 (26,300)	5.95 (20,300)	7.95 (27,200)	5.20 (17,800)	7.05 (24,000)

	60 Hz	50 Hz
	CHILLED WATER	
	DME044C	DME044C

Net Capacity Data* - kW (Btuh) - High Fan Speed

80°F DB (26.7°C) 38 %RH	Total	10.5 (36,000)	9.1 (31,100)
	Sensible	9.65 (32,900)	8.3 (28,200)
75°F DB (23.9°C) 45 %RH	Total	8.45 (28,900)	7.6 (25,900)
	Sensible	7.95 (27,100)	6.8 (23,200)
72°F DB (22.2°C) 50 %RH	Total	7.65 (26,100)	6.6 (22,600)
	Sensible	6.90 (23,500)	5.9 (20,200)

* The net capacity data has fan motor heat factored in for all ratings and the entering air conditions of 75°F (23.9°C), 45%RH, is the standard rating condition for ASHRAE 127-2007. All capacities are nominal values; actual performance will be ± 5%.*



Microprocessor control system.

The microprocessor control system, with its user-friendly wall-mount display, provides precise temperature and accurate alarm setpoints. Using touch-sensitive buttons, the monitor/control panel allows you to select and display time, temperature, humidity, alarm indication and other parameters.



Standard 60Hz units are CSA certified to the harmonized U.S. and Canadian product safety standard, CSA C22.2 No 236/UL 1995 for "Heating and Cooling Equipment" and are marked with the CSA c-us logo. The units are also MEA listed for New York City applications.

Emerson Network Power, a business of Emerson (NYSE:EMR), is the global leader in enabling *Business-Critical Continuity™* from grid to chip for telecommunication networks, data centers, health care and industrial facilities. Emerson Network Power provides innovative solutions and expertise in areas including AC and DC power and precision cooling systems, embedded computing and power, integrated racks and enclosures, power switching and controls, monitoring, and connectivity. All solutions are supported globally by local Emerson Network Power service technicians. Liebert AC power, precision cooling and monitoring products and services from Emerson Network Power deliver Efficiency Without Compromise™ by helping customers optimize their data center infrastructure to reduce costs and deliver high availability.

Emerson Network Power
Liebert Corporation
World Headquarters
1050 Dearborn Drive
P.O. Box 29186
Columbus, Ohio 43229
United States Of America
800 877 9222 Phone (U.S. & Canada Only)
614 888 0246 Phone (Outside U.S.)
614 841 6022 FAX

Emerson Network Power
European Headquarters
Via Leonardo Da Vinci 8
Zona Industriale Tognana
35028 Piove Di Sacco (PD)
Italy
39 049 9719 111 Phone
39 049 5841 257 FAX

Emerson Network Power Asia Pacific
29/F, The Orient Square Building
F. Ortigas Jr. Road, Ortigas Center
Pasig City 1605
Philippines
+63 2 687 6615
+63 2 730 9572 FAX

liebert.com

24 x 7 Tech Support
800 222 5877 Phone
614 841 6755 (outside U.S.)

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2010 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names referred to are trademarks or registered trademarks of their respective owners.

® Liebert is a registered trademark of the Liebert Corporation.

SL-11000 (R06/10) Printed in USA

EmersonNetworkPower.com

Emerson Network Power.

The global leader in enabling *Business-Critical Continuity™*.

- | | | |
|----------------|--|------------------------------|
| ■ AC Power | ■ Embedded Computing | ■ Outside Plant |
| ■ Connectivity | ■ Embedded Power | ■ Power Switching & Controls |
| ■ DC Power | ■ Infrastructure Management & Monitoring | ■ Precision Cooling |

- | |
|-------------------------------|
| ■ Racks & Integrated Cabinets |
| ■ Services |
| ■ Surge Protection |